

98REDONDA 6 AIR STOVE – TECHNICAL DATA

Wood pellet stove for space heat only



Room-sealed stove – ideal for Passive House or NZEB

Average Thermal Heat Input (Min-Max):	1.53 - 6.77kW
Performance Efficiency (Min – Max):	96 - 97.8%
Nominal Overall Power Yield (Min-Max):	1.5 - 6.5kW
Approx. Heating Capacity - Poor Insulation:	25m ³ - 105m ³
Approx. Heating Capacity - Good Insulation:	70m ³ - 310m ³
Pellet Consumption (Min-Max):	0.3 - 1.4kg/hr
Pellet Tank Capacity:	20kg
Approx. burn time (Min-Max):	14 - 62hrs
Flue Outlet Diameter:	80mm
Electrical Requirement (Normal):	83W
Electrical Requirement (Starting):	300W
Net Weight:	102kg
Approx. dimensions (H x W x D):	960 x 468 x 540




NB: Specifications & products are indicative only, may differ from those shown and may change at any time & without notice. E & OE.



Available in a selection of colours: black, red or white



- ✓ 98% efficiency
- ✓ Room-sealed stove
- ✓ Cast iron body
- ✓ Natural convection option
- ✓ Exceptionally low noise

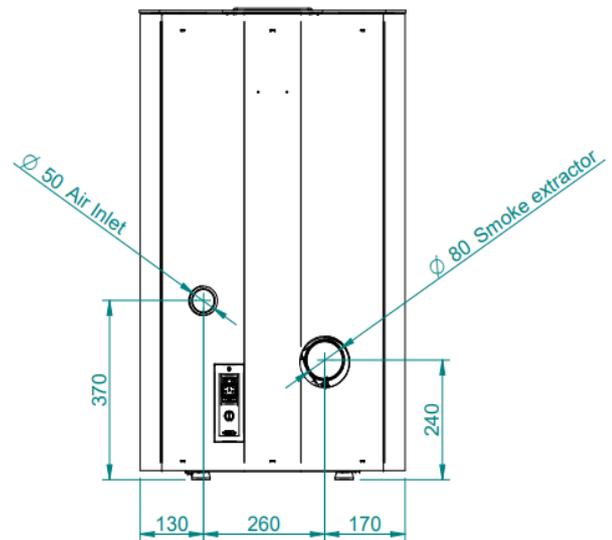

Your trusted local dealer

